


GTMR 336 A




CE DIN 15018.H1 B3
FEM 1.001-A3

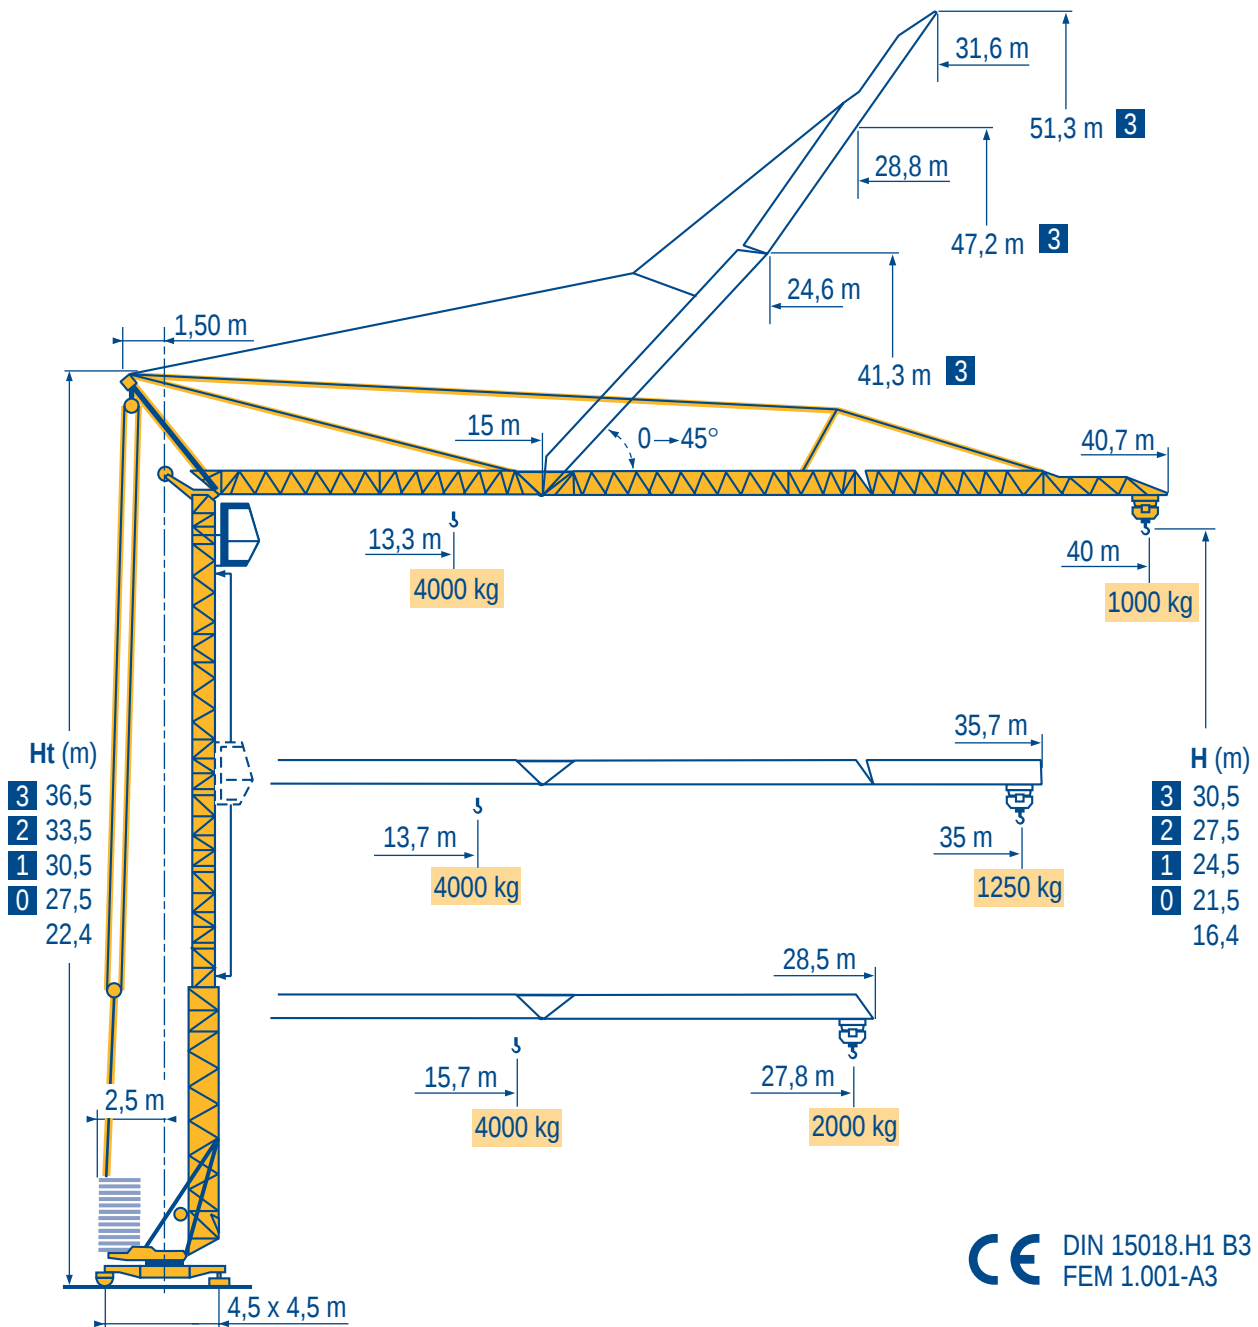


40 m	3 ▶	13,3	14	16	18	20	22	24	26	28	30	32	34	36	38	40	m
		4000	3740	3170	2740	2400	2140	1920	1740	1580	1450	1340	1240	1150	1070	1000	kg
35 m	3 ▶	13,7	14	16	18	20	22	24	26	28	30	32	34	35			m
		4000	3910	3310	2870	2520	2240	2010	1820	1660	1520	1400	1300	1250			kg
27,8 m	3 ▶	15,7	18	20	22	24	26	27,8									m
		4000	3390	2980	2660	2390	2170	2000									kg

LMR 1

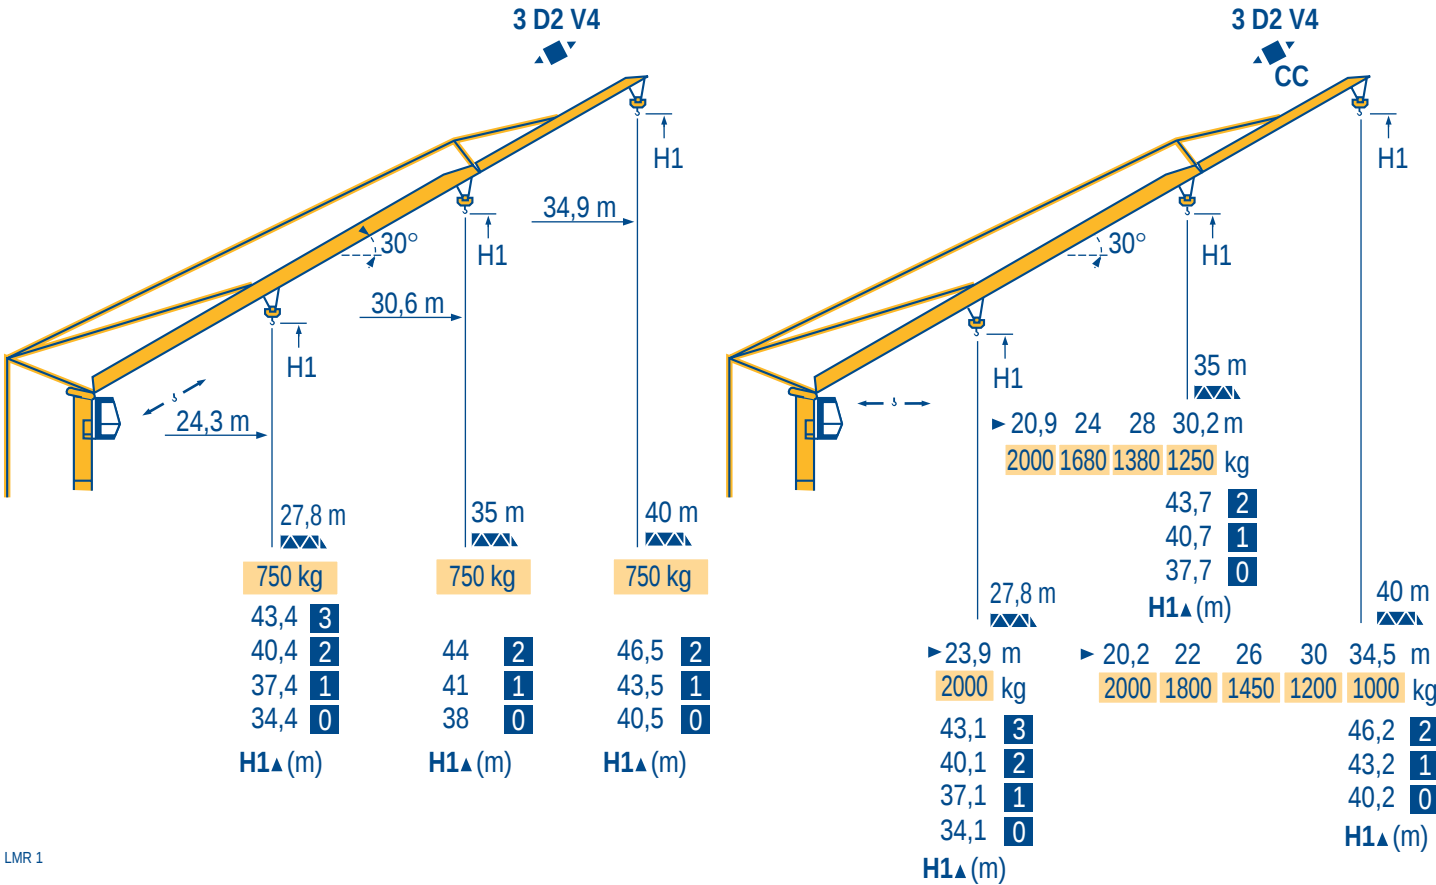

LMR 1

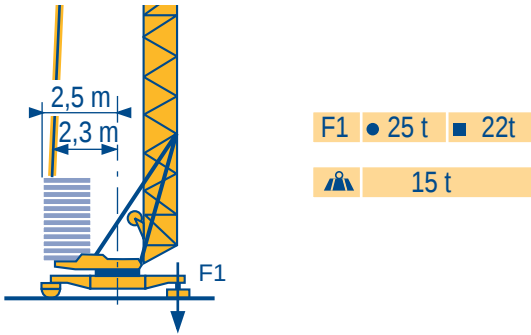

LMR 1


● Réactions en service ■ Réactions hors service ▲ A vide sans lest ni train de transport avec flèche et hauteur maximum	F D	● Reactions in service ■ Reactions out of service ▲ Without load, ballast or transport axles, with maximum jib and maximum height.	GB E	● Reazioni in servizio ■ Reazioni fuori servizio ▲ A vuoto, senza zavorra ne assali di trasporto con braccio massimo e altezza massima	I C
● Reaktionskräfte in Betrieb ■ Reaktionskräfte außer Betrieb ▲ Ohne Last, Ballast und Transportachse, mit Maximalausleger und Maximalhöhe.	D	● Reacciones en servicio ■ Reacciones fuera de servicio ▲ Sin carga, sin lastre, ni tren de transporte, flecha y altura máxima.	E	● 工作状态下的反应 ■ 非工作状态下的反应 ▲ 空载无压重也无运输车有吊臂和最大高度	C

									ch - PS hp	kW
	20 TDPC 10	m/min	8	25	50	4	12,5	25	20	15
		kg	2000	2000	1300	4000	4000	2600		
	20 LVF 10	m/min	5	25	50	2,5	12,5	25	20	15
		kg	2000	2000	1300	4000	4000	2600		
	3 D2 V4	m/min	22 - 44						4	3
	RCV 32	tr/min U/min rpm	0 → 0,8						4	3
	TVD 122	m/min	25						2 x 2	2 x 1,5
	TB 122	m/min	25						2 x 2	2 x 1,5

CEI 38	IEC 38	kVA	
400 V (+6% -10%) 50 Hz		25 kVA	84/534 - 87/405

LMR 1

● Levage ■ Distribution ● Orientation ● Translation - Conforme aux directives CEE 84/534 et 87/405 sur le niveau acoustique	F	● Hoisting ■ Trolleying ● Slewing ● Travelling - In compliance with the EEC 84/534 and 87/405 Instructions on noise level	GB	● Sollevamento ■ Distribuzione ● Rotazione ● Traslazione - Conforme alle direttive CEE 84/534 e 87/405 sul livello acustico	I
● Heben ■ Katzfahren ● Schwenken ● Kranfahren - Gemäss EWG-Richtlinien 84/534 und 87/405 für den Schall-Leistungspegel	D	● Elevación ■ Distribución ● Orientación ● Traslación - Conforme con las directivas CEE 84/534 y 87/405 sobre el nivel acustico	E	● 起升 ■ 变幅 ● 回转 ● 行走 - 符合 CEE 84/534 - CEE 87/405 声响度规定	C

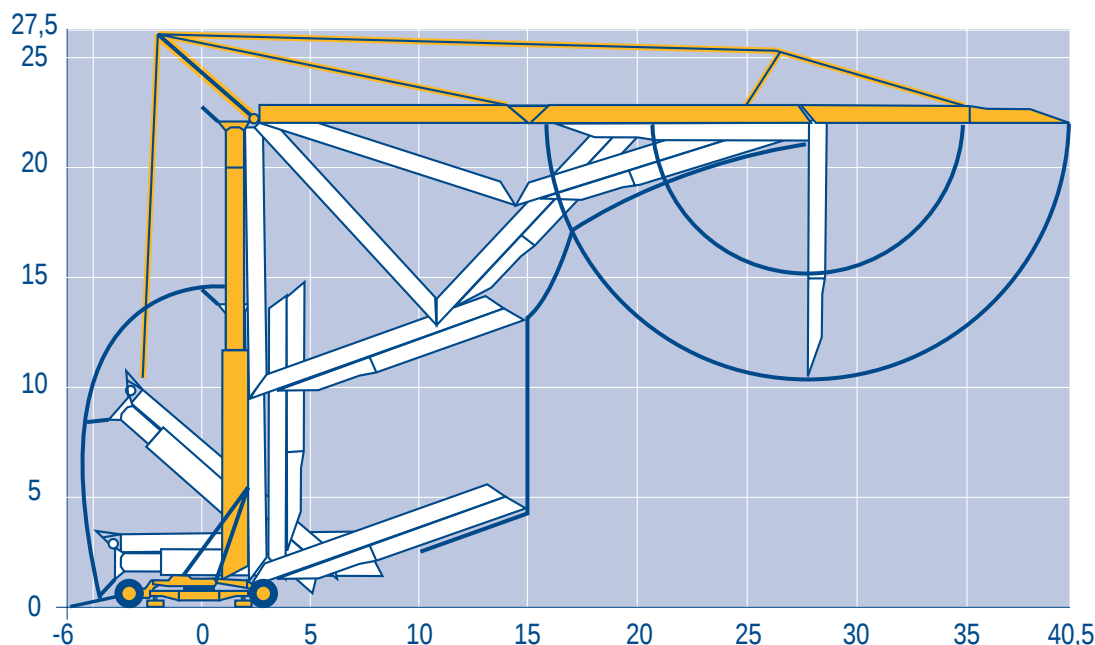

修改权在我方

Modifiche riservate

Modificaciones reservadas

Subject to modification

Änderungen vorbehalten

Modifications réservées


Printed in France

Transport
Transport

F Transport
D Transporte

GB Trasporto
E 运输


I
C

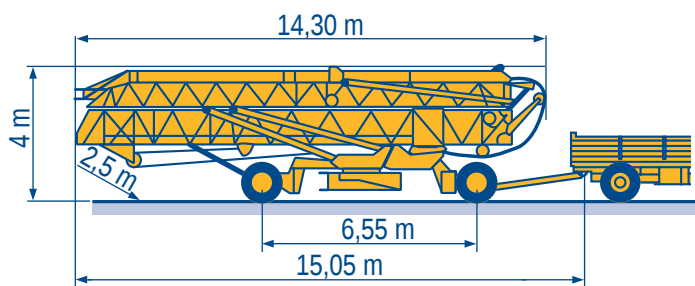

15A/25A

DJ126M/S215M

CJ125M/J215M

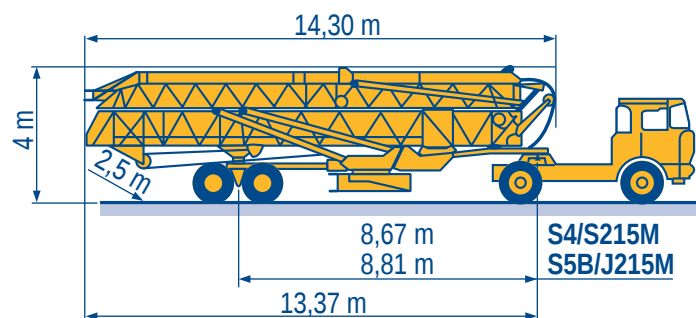

S4/S215M

S5B/J215M

POTAIN 
GROUPE LEGRIS INDUSTRIES

18.Rue de Charbonnières, B.P. 173-F
69132 ECULLY Cedex
Tél. (33)04.72.20.20.20
Fax (33)04.72.20.20.00
<http://www.potain.fr>
E-mail : mkt@potain.fr

GTMR 336 A

Copyright.Reproduction interdite © POTAIN 1997

Deutschland
POTAIN GmbH Tel : 06.105.704.0
Italia
POTAIN S.p.A. Tel : 039.65.631
China
Zhangjiagang POTAIN Tel : 520. 877.1451